




DRIVEN BY POSSIBILITY™

CLEAN MASTER™ HOSE

WASHDOWN + WASHDOWN 1000

PERFORMANCE + RELIABILITY WHEN CLEANLINESS COUNTS.

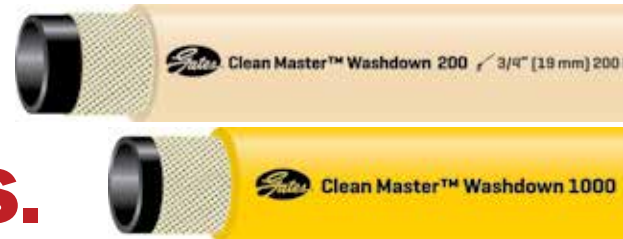

GATES Clean Master™ Washdown and Washdown 1000 hoses are designed for low-to-medium pressure hot or cold water washdowns in industrial food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries — where sanitation is high priority.

We believe operating challenges are made to be overcome. That's why thousands of industrial facilities, global operations, and OE manufacturers around the world choose Gates hose and hydraulic systems to power their most demanding fluid power applications.

FEATURES + BENEFITS

Clean Master™ Washdown 1000 is designed for use with mild detergents in meat and poultry plants where resistance to oil and animal fat is critical

Non-marking cover

Yellow cover on Washdown 1000 is for safety

Washdown 1000 offers the highest working pressure at 1,000 psi (70 bar) in textile reinforced hose

Washdown 150 with nozzle contains no metallic parts to help prevent damage to equipment

CLEAN MASTER™ WASHDOWN HOSE LINE PRODUCT SPECIFICATIONS

TUBE	Washdown 150 (Nozzle): Black SBR (Type D) Washdown 200: White EPDM (Type P) FDA Washdown 1000: Black Modified Nitrile (C2)
REINFORCEMENT	Washdown 150 (Nozzle): Braided, high-tensile synthetic textile cord Washdown 200: High-tensile synthetic textile cord Washdown 1000: Braided, high-tensile synthetic textile cord
COVER	Washdown 150 (Nozzle): Gray Natural Rubber (Type D) Washdown 200: White EPDM (Type P) Washdown 1000: Yellow Modified Nitrile (C2), other colors available MTO
TEMPERATURE RANGE	Washdown 150: -29°C to +82°C (-20°F to +180°F) continuous washdown service Washdown 200: -20°C to +100°C (-20°F to +212°F) continuous washdown service Washdown 1000: -40°C to +100°C (-40°F to +212°F) continuous washdown service



APPLICATIONS

- Breweries
- Dairies
- Food Processing Plants
- Sanitation
- Paper Mills
- Industrial Plants

**OUR GLOBAL
FOOTPRINT
HELPS YOU
MOVE FORWARD.**

HOSE	ID (INCH)	DIN	OD (INCH)	OD (MM)	WP (PSI)	WP (MPa)	MBR (INCH)	MBR (MM)	WEIGHT (LBS/FT)	WEIGHT (KG/100M)	COLOR
Washdown 1000	3/8	9.5	0.73	18.5	1000*	6.89	4.0	102	0.18	27	Yellow
Washdown 1000	1/2	12.7	0.94	23.9	1000*	6.89	5.0	127	0.29	43	Yellow
Washdown 1000	3/4	19.1	1.20	30.5	1000*	6.89	6.0	152	0.41	61	Yellow
Washdown	1/2	12.7	0.91	23.1	200	1.38	3.0	76	0.30	44	White
Washdown	3/4	19.1	1.25	31.8	200	1.38	4.5	114	0.55	82	White
Washdown	1	25.4	1.52	38.6	200	1.38	6.0	152	0.74	110	White
Washdown with Nozzle	3/4	19.1	1.25	31.8	150	1.03	6.0	152	27.50	82	Gray
Washdown with Nozzle	1	25.4	1.50	38.1	150	1.03	8.0	203	33.50	100	Gray
Washdown with Nozzle	1 1/4	31.8	1.75	44.5	150	1.03	10.0	254	39.50	118	Gray

* Air service working pressure is 300 psi

GATES AUSTRALIA PTY LTD

1-15 Hydrive Close, Dandenong South, Victoria, 3175
PH: +61 3 9797 9666 FAX: +61 3 9797 9600

GATESAUSTRALIA.COM.AU

FOLLOW: GATES AUSTRALIA

