



DRIVEN BY POSSIBILITY™

TRUFLEX™ - LIGHT DUTY

WRAPPED, FRACTIONAL HORSEPOWER V-BELT

Engineered with all the qualities of a great belt, including flexibility, durability, and resistance to contaminants. It includes a thin profile, designed for small-diameter sheaves, and a lower cord positioning to improve belt performance on light-duty belt drives and in your backside idler applications.

CONSTRUCTION + SPECIFICATIONS

- Gates® Curves provide proper cord support and full contact with the sheave-groove for uniform loading, uniform wear, and increased belt life
- Flex-Bonded cords are strongly bonded to the body of the belt resulting in equal load distribution and the absorption of bending stress without cord deterioration
- Flex-Weave™ oil and heat resistant cover protects the belt core from the toughest environments

FEATURES + BENEFITS

- Perfect for auxiliary automotive applications like electric windows, windshield wipers, and central locking systems, drive pumps, power tools, and domestic appliance applications, FHP motors and light-duty applications
- Meets ARPM/RMA IP-3-2 oil and heat resistant standards
- Meets ARPM/RMA IP-3-3 static conductivity requirements
- REACH and RoHS 2 compliant
- Operating temperature range: -30°C/-22°F to +60°C/140°F



BELT IDENTIFICATION

Singles: **3L280**

3L - Cross Section

280 - Outside Circumference (in), plus added zero to designate part number

Available Stock Sizes


0 (2L) 10-46 (in)

1 (3L) 11-74 (in)

2 (4L) 15-100 (in)

3 (5L) 23-100 (in)

BELT IDENTIFICATION CHART

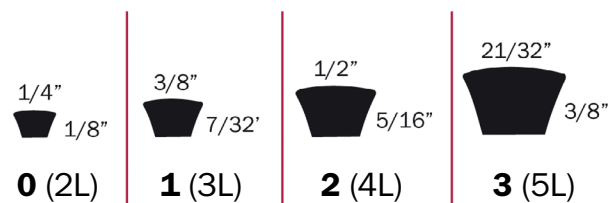

GATES® AUSTRALIA PTY LTD

1-15 Hydrive Close, Dandenong South, Victoria, 3175
PH: +61 3 9797 9666 FAX: +61 3 9797 9600

GATESAUSTRALIA.COM.AU

FOLLOW US: GATESAUSTRALIA



SEPT 2021