



DRIVEN BY POSSIBILITY™





HIGH PERFORMANCE BELT DRIVES

INDUSTRIAL POWER TRANSMISSION PRODUCTS AND SERVICES

PREDATOR™ V-BELTS DESIGNED FOR THE MOST AGGRESSIVE APPLICATIONS

High powered motors. Shock loads from sudden starts and stops. Dirty operating environments. High heat. Contamination from oil or solvents. **Predator™ V-belts handle them all.**

- Maintenance free
- 35% less drive cost
- 60% less drive width
- 50% less weight
- Shaft load remains unchanged

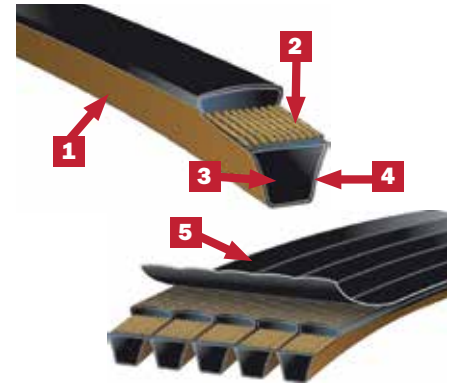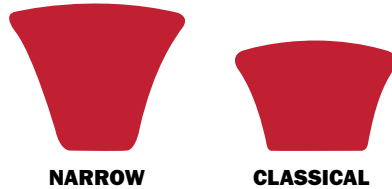

1. Reduce friction and heat build-up under shock loads with abrasion and puncture-resistant bareback (non-rubber) **double-layer fabric cover**.
2. Minimal need for re-tensioning due to stronger-than-steel **Aramid fibre (Kevlar)** tensile cords that reduce belt stretch by 50%.
3. Oil and heat resistant **Chloroprene compound body**, rated for 80 °C, outperforms other rubbers in harsh operating conditions.
4. Extend drive life with the **patented curved sidewall** that allows belt to enter the pulley groove cleanly and smoothly, reducing sidewall wear on belt and pulley.
5. **Multiple-layer tie band** joins belts together into a Predator™ Powerband™ that provides lateral rigidity for reduced vibration and belt roll-over on multi-groove pulleys.

PREDATOR® CROSS SECTIONS


Belt Type	Classical	Narrow (ISO)	Narrow (RMA)
Singles	AP, BP, CP	SPBP, SPCP	5VP, 8VP
Powerbands™	BP*, CP*	SPBP, SPCP, 9JP*, 15JP*	3VP, 5VP, 8VP

NOTE: Predator™ V-belts must be ordered in matched sets.

*Available on request

COMPACT DRIVE SAVES SPACE, WEIGHT AND MONEY

Predator™ V-belts can handle up to 2.2 times more power than the equivalent size standard V-belt. A more compact drive that weighs less, puts less strain on costlier components, and uses fewer belts. All of which saves you money. See the difference in the following example:

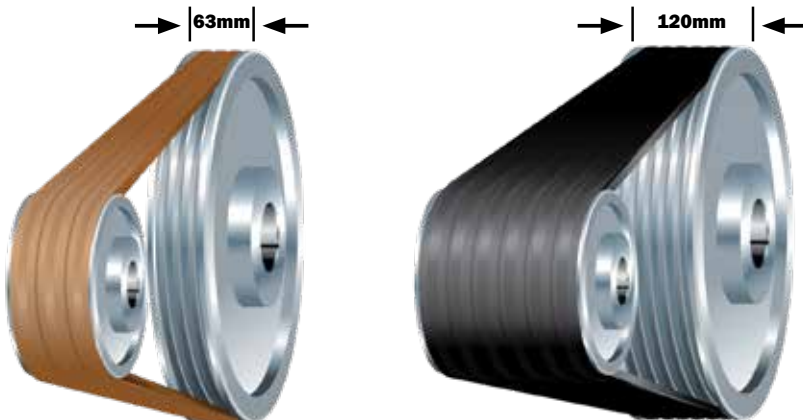

PREDATOR™ - SPBP BELTS

- 3 belts required
- Rated kW/Strand: 53.5kW
- Total weight: 72.2 kg

VS

STANDARD - SPB BELTS

- 6 belts required
- Rated kW/Strand: 26.8kW
- Total Weight: 114.6 kg

COMPARED WITH STANDARD V-BELT DRIVES, THE COMPACT PREDATOR™ DRIVE PROVIDES GREATER POWER CAPACITY IN HALF THE WIDTH AND WEIGHT, AT A THIRD OF THE COST, WITH NO CHANGE IN SHAFT LOADS. PREDATOR® V-BELTS PROVIDE THE IDEAL SOLUTION TO REPLACE COSTLY, MADE TO ORDER, 8V BELT DRIVE PULLEYS WITH STANDARD SPB OR SPC.


POLY CHAIN® GT™ CARBON™ POLYURETHANE SYNCHRONOUS BELT WITH CARBON FIBRE CORDS

Trying to reduce your energy bill? Experiencing downtime to re-tension & lubricate your roller chain? High moisture, oil or chemicals causing you problems? **Poly Chain® GT™ Carbon™ synchronous belts are the solution.**


- Maintenance free
- 400% greater capacity than HTD timing belts
- 5% energy savings over V-belts
- 99% efficiency for life of the drive
- Reduce downtime
- Reduce weight and overhung loads
- Over 120,000 possible drive combinations
- Inert to most acids, chemicals and water
- Stainless steel sprockets & taper locks available in certain sizes




POLY CHAIN® GT® CARBON™ PITCH SIZES			
	Pitch mm	T (mm)	B (mm)
8MGT	8.0	3.4	5.9
14MGT	14.0	6.0	10.2



NOTE: 19MGT Poly Chain® GT™ Carbon™ available as a made-to-order.

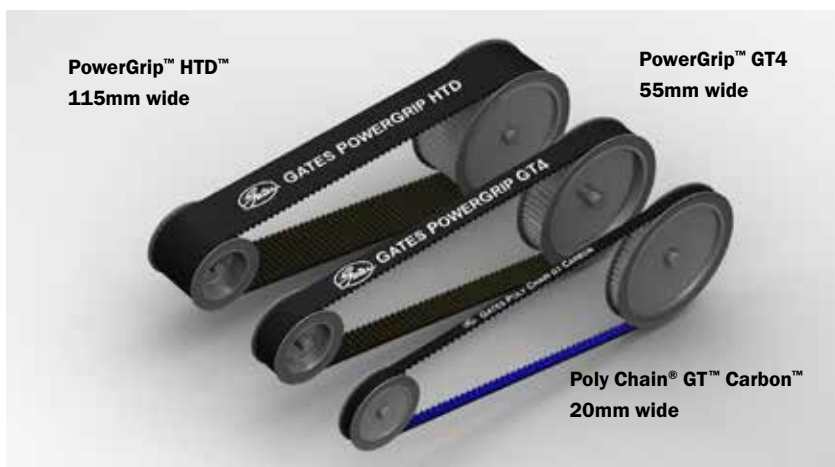

- Width-for-width roller chain conversions
- No stretch, no lubrication, no re-tensioning
- Outlasts roller chain up to 4 to 1
- Outlasts roller chain sprockets up to 10 to 1
- Inside & backside idlers can be used

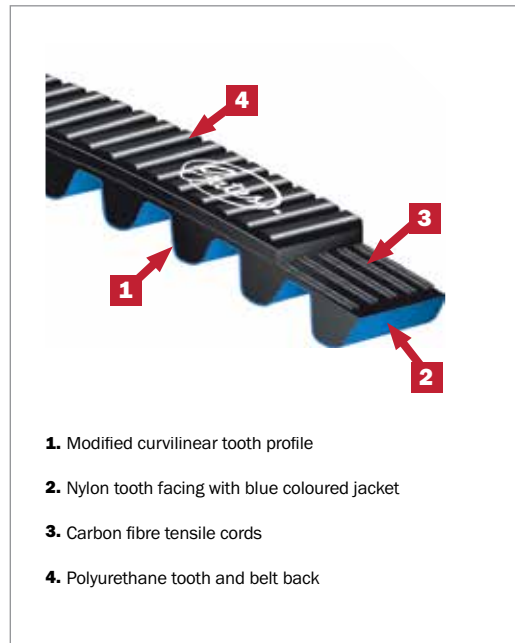

1. Modified curvilinear tooth profile
2. Nylon tooth facing with blue coloured jacket
3. Carbon fibre tensile cords
4. Polyurethane tooth and belt back

**“THIS IS HOW WE’VE ALWAYS DONE IT ”
WON’T CUT IT ANYMORE.
SOMEONE TO LUBRICATE
THAT OLD ROLLER CHAIN,
SOMEONE ELSE TO CLEAN
UP THE GREASE ON THE
FLOOR, ANOTHER PERSON
SHUTTING DOWN DRIVES
TO RE-TENSION.**




POLY CHAIN® CARBON™ VOLT™ STATIC CONDUCTIVE POLYURETHANE SYNCHRONOUS BELT WITH CARBON FIBRE CORDS

Application in an explosive environment, e.g. oil and gas, flour or sugar processing? Does the belt get wet? Roller chain wearing too quickly? Need a more efficient drive? **Poly Chain® Carbon™ Volt™ belts are the ideal solution.**

- Static Conductive to ISO 9563 throughout the lifetime of the belt
- Patented Static Conductive construction
- All the advantages and performance benefits of Poly Chain™ GT™ Carbon
- Available in all 8MGT & 14MGT sizes
- Ideal for fin fan drives



www.GatesAustralia.com.au/VOLT

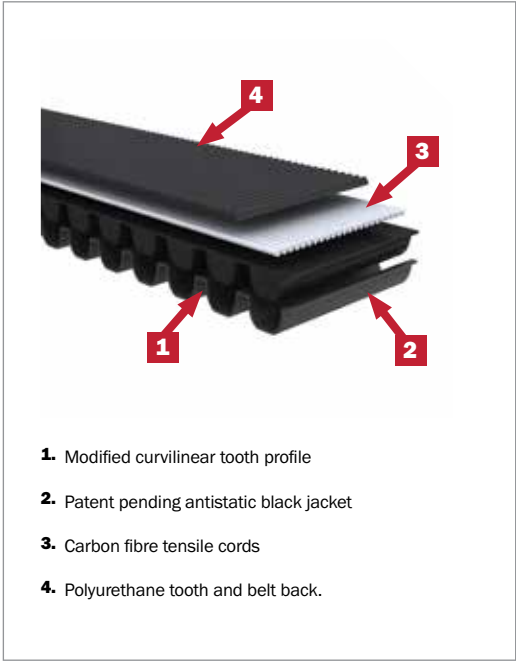


1. Modified curvilinear tooth profile
2. Patent pending antistatic black jacket
3. Carbon fibre tensile cords
4. Polyurethane tooth and belt back.

DRAFTGUARD™ ANTI-ROTATION DEVICE FOR ACHE BELT DRIVES

Item Code - 78140004

- Prevents back-drafting of fans
- Eliminates hard starts during wind-milling
- Avoids damage to belt drive system and structure during start up
- Protects technicians from serious injury during maintenance operations
- Maintenance-free bearings greased-for-life assemblies
- Multiple mounting options, Locking Ring, Taper-bush or QD Bush
- Adapts to clockwise or counter clockwise rotation
- Unlike motor clutches, Draftguard™ prevents wind-milling after belt failure

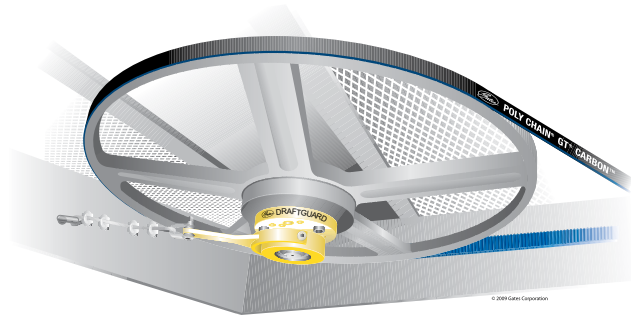


www.GatesAustralia.com.au/Draftguard

POWERGRIP™ GT4 RUBBER SYNCHRONOUS BELT WITH FIBREGLASS CORDS

HTD belts not strong enough? After a more efficient drive than V-belts? Need a compact, high precision drive? Hazardous explosive areas requiring a static conductive rated belt? **Think PowerGrip™ GT4 synchronous belts.**


- Maintenance free
- Low noise and vibration
- Greater capacity, narrower drive designs
- Abrasion resistant, longer life
- Static conductive to ISO 9563
- Fully operational in a wide range of temperatures: -40°F to +248°F (-40°C to +120°C) with intermittent use up to 284°F (140°C)

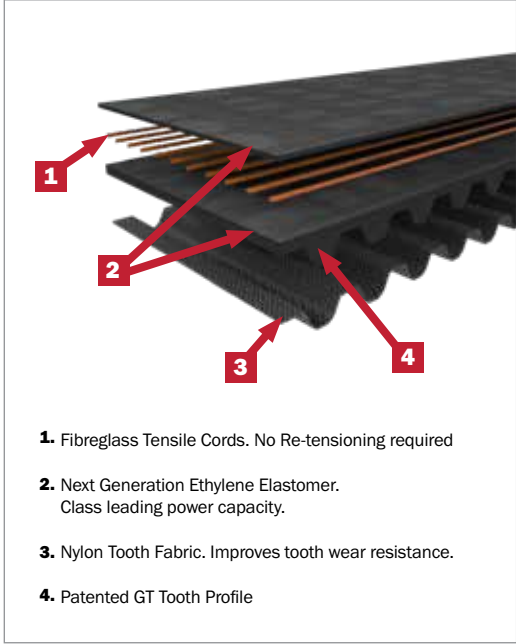

AT LEAST 200% CAPACITY OVER HTD BELTS MEANS YOU CAN HALVE YOUR DRIVE WIDTH USING POWERGRIP™ GT4 BELTS.

POWERGRIP™ GT3 PITCH SIZES			
	Pitch (mm)	T (mm)	B (mm)
2MGT	2.0	0.7	1.5
3MGT	3.0	1.1	2.4
5MGT	5.0	1.9	3.8

POWERGRIP™ GT4 PITCH SIZES			
	Pitch (mm)	T (mm)	B (mm)
8MGT	8.0	3.4	5.6
14MGT	14.0	6.0	10.0





QUAD-POWER™ 4 HIGH TEMPERATURE RAW-EDGE, NOTCHED, NARROW SECTION V-BELT

Applications with extreme heat. Need to reduce you maintenance and downtime? Pulleys too small for your wrapped V-belts?

Quad-Power™ 4 belts are the answer.


- Service Free
- Increased temperature range -50 °C to +130 °C
- Increase efficiency up to 3%
- Reduce drive width up to 50%
- Space saving and design freedom
- Static conductive to ISO 1812 and IP3-3
- Match Free to UNISET & V80 matching systems
- Available as single belts or Powerbands™

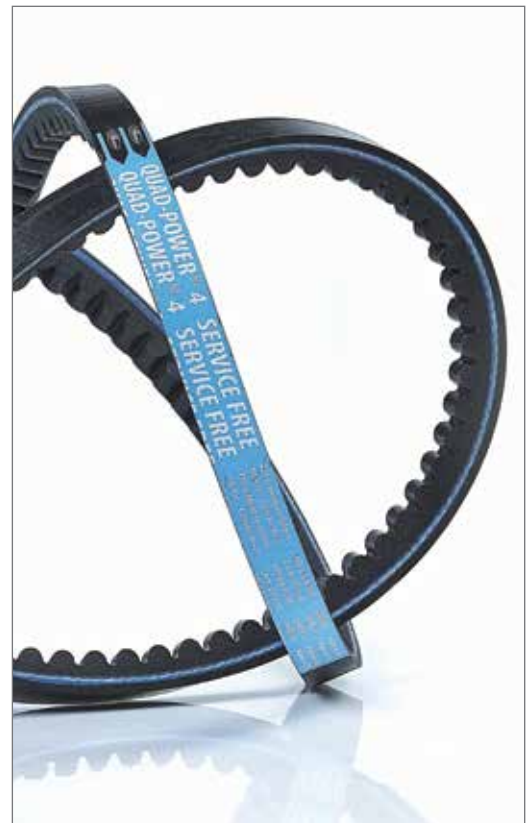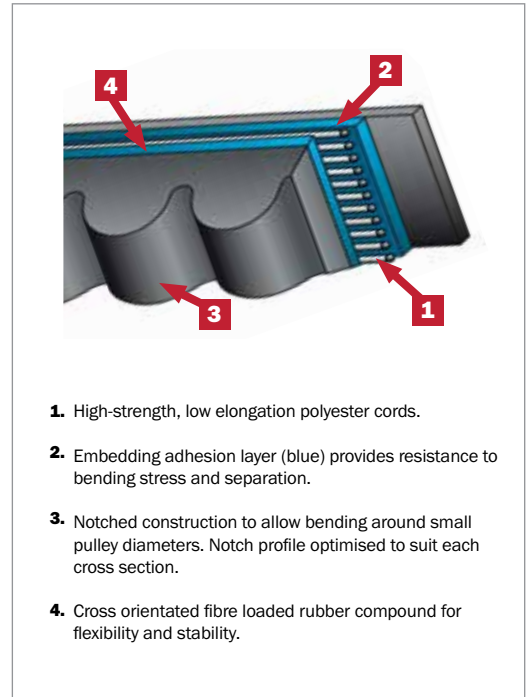


QUAD-POWER™ 4 CROSS SECTIONS

Belt Type	Narrow (ISO)	Narrow (RMA)
Singles	XPZ, XPA, XPB, XPC	3VX, 5VX, 8VX
Powerbands™	XPZ, XPA, XPB	3VX, 5VX

NOTE: Some Narrow (RMA) belts and Powerbands are labelled Super HC™ Molded Notch



Hi-Power™ II 12 x B46
Pulley Width = 234mm
25,000 hr belt life



Super HC™ 8 x SPB1250
Pulley Width = 158mm
25,000 hr belt life



Quad-Power™ 4 5 x XPB1250
Pulley Width = 101mm
25,000 hr belt life



**UPGRADED EPDM RUBBER
CONSTRUCTION IS RATED
TO +130 °C**

PREVENTIVE MAINTENANCE TRAINING

Gates offers Preventive Maintenance Training to assist in achieving the best performance from your belt drives and keeping downtime and maintenance at a minimum.

The most common causes of poor belt life are improper maintenance and improper installation. The course aims to ensure that these causes are illustrated to provide trouble free drives and increase your uptime.

THE COURSE COVERS THE FOLLOWING:

- Belt identification
 - Belt construction
 - Features and benefits
 - Belt drive problems
 - Pulley and belt inspection
 - Guard maintenance
 - Shutdown procedures
 - Pulley installation and alignment
 - Belt tensioning techniques
 - Re-tension periods
 - Training on the use of tension and laser alignment tools
 - Troubleshooting failure modes
- Duration of course = 3 – 4 hrs.
Max 12 per class.**



MAINTENANCE KITS

Optimum belt drive performance is not achieved via guess work, you need the right tools for the job.

Gates most popular Maintenance Tool Kit [GIBMAINT-3] allows any belt drive to be accurately installed and maintained. It includes Gates premium 550C Sonic Tension Meter and EZ Align® Green laser alignment tool. The Belt Wear Gauges allow for quick V-belt pulley inspections.

The aluminium tension plates can be installed on the drive or guard to ensure belt details and tensioning data are always on hand.

Three other kit versions are available with slightly different components included to suit your requirements and budget.



MAINTENANCE KIT 3

MAINTENANCE KIT 1

Item Code - GIBMAINT-1 /1026888

- 1 x Hard Carry Case with foam liner
- 1 x Gates 550C Sonic Tension Meter
- 1 x Gates AT-1 Laser Alignment Tool
- 1 x Gates 15kg Single Barrel Tension Tester
- 1 x Gates 30kg Double Barrel Tension Tester
- 1 x Gates Belt and Pulley Gauges
- 2 x Gates Aluminium Tension Plates
- 2 x Gates Tension Stickers
- 1 x Gates Steel Ruler
- 1 x Gates Measuring Tape
- 1 x Gates Pocket Tension Guide

MAINTENANCE KIT 3

Item Code - GIBMAINT-3 /1026886

- 1 x Hard Carry Case with foam liner
- 1 x Gates 550C Sonic Tension Meter
- 1 x Gates EZ Align® Green Laser Alignment Tool
- 1 x Gates 15kg Single Barrel Tension Tester
- 1 x Gates 30kg Double Barrel Tension Tester
- 1 x Gates Belt and Pulley Gauges
- 2 x Gates Aluminium Tension Plates
- 2 x Gates Tension Stickers
- 1 x Gates Steel Ruler
- 1 x Gates Measuring Tape
- 1 x Gates Pocket Tension Guide

Item Code - GIBMAINT-3A /1026905

- Same as above, also includes:
1 x Inductive Sensor (magnet included)

MAINTENANCE KIT 2

Item Code - GIBMAINT-2 /1026889

- Same as Kit 1 minus
the 550C Sonic Tension Meter

MAINTENANCE KIT 4

Item Code - GIBMAINT-4 /1026890

- Same as Kit 3 minus
the 550C Sonic Tension Meter

**MORE THAN 60% OF ALL
BELT DRIVE ISSUES ARE
CAUSED BY IMPROPER
DRIVE MAINTENANCE
OR INSTALLATION.**

**THE RIGHT TRAINING
MATCHED WITH THE
APPROPRIATE PRODUCT
AND TOOLS REDUCE
DOWNTIME AND INCREASE
EFFICIENCY, SAVING
ENERGY AND MONEY.**

550C - SONIC TENSION METER

Item Code - 74200550

The 550C Sonic Tension Meter can easily be operated by one person for fast, accurate readings on all types of synchronous and V-belt drive systems. Use the standard cord sensor to reach inside cramped compartments where conventional methods would be impossible. This small, light and user friendly meter features:

- Output readings measurable in hertz, pounds, kilograms and newtons.
- Improved frequency range from 10-5000 hertz.
- Variable frequency range filters.
- Auto gain control automatically adjusts meter sensitivity.
- 40 memory registers for belt contents.
- LCD screen with back light.
- Sonic 550C Sensor Compatibility - All sensor-heads are compatible and can be mounted on the following Sonic Tension meter models: Sonic 505C, Sonic 507C, Sonic 508C, Sonic 550C.



OPTIONAL SENSORS:

1. Standard Cord Sensor (74200206)
2. Flat Flexible Sensor (74200205) (Included with 74200550)
3. Inductive Sensor (74200212) (Magnets included)
4. Replacement Magnet (74201212)



IMPORTANT NOTE:
GATES SONIC TENSION METER SHOULD NOT BE USED IN EXPLOSIVE RISK AREAS

EZ ALIGN® GREEN - LASER ALIGNMENT TOOL

Item Code - 74203000

Gates EZ Align® Green precision laser alignment device allows a single person to quickly and easily align a belt drive. The green laser is **10x brighter** than the previous red laser design allowing for much easier use in bright areas. Gates EZ Align® Green tool uses powerful laser line technology for maximum angular accuracy on belt drives up to 7.6 metres in centre distance.

- FAST and EASY
- Shows parallel and angular misalignment simultaneously
- More accurate and efficient than any other laser tool or method
- Reduces vibration and belt noise
- Prolongs belt and pulley life
- Suitable for both V-belt and synchronous belt drives
- For both horizontally and vertically mounted drives
- Alignment can be adjusted by one operator
- New design includes stronger magnetic brackets to hold the tool more firmly in place
- LED torch now included in the end of the Laser unit of this new design

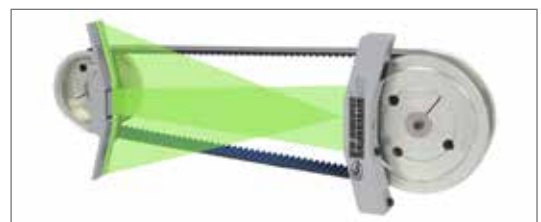

BIRD™ - BELT INSTALLATION AND ROTATION DEVICE INNOVATIVE SAFETY DEVICE TO PROTECT OPERATORS FROM INJURY

Item Code - 74201001

Gates has developed the Belt Installation + Rotation Device (BIRD™) to minimise finger and hand injuries due to hands getting caught in pinch points during routine installation and maintenance. While a drive is shut down and locked out, the BIRD™ safely facilitates a rotational inspection of a drive.

Prior to the launch of the BIRD™, in order to inspect or install a drive, personnel would pull on the belt or grab the edges of the pulley or sprocket to turn the drive. Regardless of the care taken, this procedure is inherently dangerous — a split second leads to a hand or finger pulled into a pinch point.

- Keeps hands and fingers away from pinch points, reducing the potential for injury
- Provides a more ergonomic way to rotate belt drives
- Switchable on/off magnets allow for easy installation and removal of the BIRD
- Durable case to protect the BIRD™ when not in use



REDUCE THE POTENTIAL FOR OPERATOR HANDS AND FINGERS BEING CAUGHT IN PINCH POINTS



ON/OFF SWITCHES ACTIVATE THE MAGNETS

ALUMINIUM HANDLES ALLOW FOR SAFE DRIVE ROTATION





AT-1 LASER ALIGNMENT TOOL

Item Code - 740110010

This tool can be used to align both V-belt and synchronous belt drives. It can show both parallel and angular misalignment between the pulleys.



V-BELT & PULLEY GAUGES

Item Code - 74010015

Gates colour coded V-belt and pulley gauges provide a simple solution for detecting worn pulleys and identifying V-belt cross sections.

The pulley wear gauges fit standard industrial grooves, identifying excessive wear before it leads to premature belt failure.



TENSION TESTERS


Item Codes - Single Barrel - 15kg (74010076)

Double Barrel - 30kg (74010075)

Gates has available two tension testing tools for use in the servicing of belt drives.

The single barrel (15kg) and the double barrel (30kg) tester can be used to accurately measure the tension of individual or joined belts upon installation or during maintenance.

Using the tension tester ensures that correct tension is maintained and is repeatable. This will yield not only a longer service life but a predictable one, enabling scheduled replacement rather than breakdown replacement.

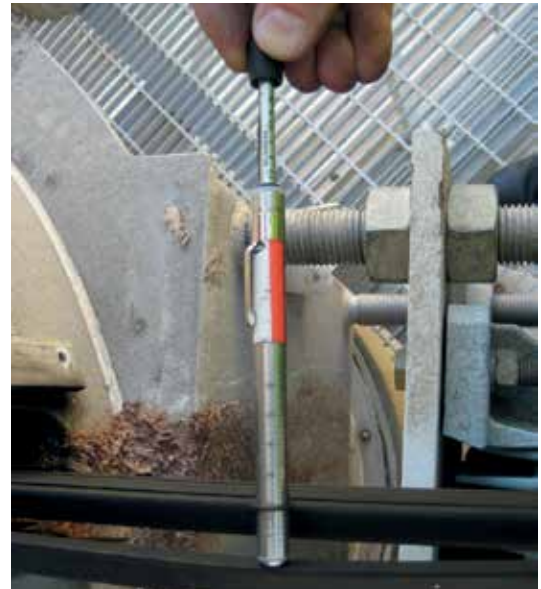

INDUSTRIAL BELT MEASURER

Item Code - 740110001

Gates belt measurer can be mounted on your wall to easily find the inside length of a V-belt. It provides an accurate measure of all belt sizes between 600mm to 4100mm. When used in conjunction with our belt and pulley gauges belt identification is simple.



TENSION PLATES & STICKERS

Item Codes - Plates (1026879) Sticker (1026891)

No more guessing tensions or wondering what the correct belt should be. Gates can supply all your drive critical information on adhesive backed aluminium plates or stickers that can be attached right onto the machine.

With the plate and sticker specifying which belt, how many and the tensioning data, incorrect belt installation is avoided.

ENGINEERING TECHNICAL SERVICES

Gates field team members are available to work with you on site to provide solutions for any new drives or belt drive problems you are currently experiencing.

Gates can visit and survey your entire site/plant, offering:

- Drive design expertise
- On-site drive performance evaluations
- Laser alignment
- Belt tensioning
- Drive operating condition analysis
- Belt failure analysis
- Solutions for special application requirements
- Recommendations and solutions
- Gates offers Preventive Maintenance Training to assist in achieving the best performance from your belt drives and keeping downtime and maintenance at a minimum. Please contact us at salesAUS@gates.com.au for more information.



DESIGN POWER™ BELT DRIVE DESIGN SOFTWARE

Gates Design Power™ includes updated and upgraded versions of Gates' Design IQ™ and Design Flex Pro™ applications. Gates Design Power is available globally as a free download and includes 15 different languages for use across most regions.


DESIGN POWER™

In addition to the user-friendly functionality of each of the specialised design modules, Design Power™ features a state-of-the-art knowledge base with design guidance and the most sophisticated belt-performance models. Automatic synching with the Gates catalog streamlines and empowers the design process with direct access to the latest products, specifications and ratings. Design Power™ also adds new organisational features on par with the best digital collaboration tools, holding multiple designs in a single project file, tracking design derivatives and iterations, and noting who made what changes along the way.

Design Power™ Features:

- Auto rollout new product introductions
- Multiple drive designs in a project
- Create and track design derivatives

Download FREE from
www.GatesAustralia.com.au/DesignPower

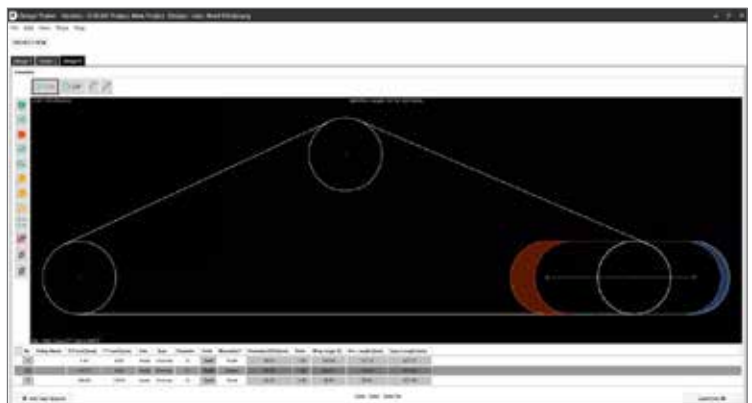



DRIVEN BY POSSIBILITY™



GATES AUSTRALIA PTY LTD

1-15 Hydrive Close, Dandenong South, Victoria, 3175
PH: +61 3 9797 9666 FAX: +61 3 9797 9600

GATESAUSTRALIA.COM.AU

FOLLOW: GATES AUSTRALIA



JULY 2023