



HYDRAULIC COUPLING IDENTIFICATION CHART

1 DETERMINE SEAL

Mated angle seat with O-ring

This type of seal is found on BSP and DIN terminations. It uses both the O-ring and the mated angle to make the seal.

2 VISUAL IDENTIFICATION

A. O-Ring Location Inside **B. Nose Seat** Inverted **C. Seat Angle** 60° Inclusive **D. Coupling Termination** British Standard Pipe Parallel

A. O-Ring Location Inside **B. Nose Seat** Inverted **C. Seat Angle** 24° Inclusive **D. Coupling Termination** DIN 24° cone

3 MEASURE

Dash Size	Nominal Size (ins)	No. Threads per Inch	Male Thread O.D. (mm) MBSP	Female Thread I.D. (mm) FBSPPRX
-4	1/4"	19	13.0	11.7
-6	3/8"	19	16.5	15.2
-8	1/2"	14	20.8	18.9
-10	5/8"	14	22.8	20.9
-12	3/4"	14	26.3	24.4
-16	1"	11	33.1	30.6
-20	1.1/4"	11	41.8	39.3
-24	1.1/2"	11	47.7	45.2
-32	2"	11	59.5	55.5

Metric Thread size	Tube O.D. Light Series	Tube O.D. Heavy Series	Male Thread O.D. (mm) MDLMDH	Female Thread I.D. (mm) FDLORX/FDHRX
M12 X 1.5	6	-	12.0	10.5
M14 X 1.5	8	-	14.0	12.5
M16 X 1.5	10	8	16.0	14.5
M18 X 1.5	12	10	18.0	16.5
M20 X 1.5	14	12	20.0	18.5
M22 X 1.5	15	14	22.0	20.5
M24 X 1.5	-	16	24.0	22.5
M26 X 1.5	18	-	26.0	24.5
M30 X 2.0	22	20	30.0	28.0
M36 X 2.0	28	25	36.0	34.0
M42 X 2.0	-	30	42.0	40.0
M45 X 2.0	35	-	45.0	43.0
M52 X 2.0	42	38	52.0	50.0

Dash Size	Nominal Size	Flange O.D. (mm)	Flange Head Thickness (mm) "e"	"A" (mm)	"B" (mm)	"C" (mm)
-8	1/2"	30.2	6.7	38.1	8.7	7.7
-12	3/4"	38.1	6.7	47.6	11.1	10.1
-16	1"	44.5	8.0	52.3	13.1	12.1
-20	1.1/4"	50.8	8.0	58.7	15.1	14.1
-24	1.1/2"	60.3	8.0	69.8	17.8	16.9
-32	2"	71.4	9.7	77.7	20.4	21.2


Flange O.D. (mm)	Flange Head Thickness (mm)	"A" (mm)	"B" (mm)	"C" (mm)	Flange O.D. (mm)	Flange Head Thickness (mm)	"A" (mm)	"B" (mm)	"C" (mm)
31.8	7.7	40.5	9.1	8.1	-	-	-	-	-
41.3	8.8	50.8	11.9	10.9	41.4	14.2	50.8	11.9	10.9
47.6	9.5	57.1	13.9	12.9	47.6	14.2	57.1	13.9	12.9
54.0	10.3	66.7	15.9	14.9	54.0	14.2	66.7	15.9	14.9
63.5	12.6	79.4	18.2	17.3	63.5	14.2	79.4	18.2	17.2
79.4	12.6	94.8	22.2	21.1	79.5	14.2	94.8	22.2	21.2

Dash Size	Nominal Size (ins)	No. Threads per Inch	Male Thread O.D. (mm) MB	Female Thread I.D. (mm) FB	O-Ring I.D. (mm)
-2	1/8"	24	7.9	6.8	6.0
-3	3/16"	24	9.5	8.3	7.6
-4	1/4"	20	11.0	9.9	8.9
-5	5/16"	20	12.5	11.5	10.5
-6	3/8"	18	14.1	12.9	11.9
-8	1/2"	16	18.9	17.5	16.3
-10	5/8"	14	22.1	20.5	19.2
-12	3/4"	12	26.9	24.4	23.5
-14	7/8"	12	30.0	28.2	26.6
-16	1"	12	33.2	31.3	29.7
-20	1.1/4"	12	41.2	39.2	37.5
-24	1.1/2"	12	47.6	45.5	43.7
-32	2"	12	63.5	61.4	59.4


Dash Size	Nominal Size (ins)	No. Threads per Inch	Male Thread O.D. (mm) MFFOR	Female Thread I.D. (mm) FFORX
-4	1/4"	18	14.1	12.9
-6	3/8"	16	17.3	15.9
-8	1/2"	16	22.0	19.1
-10	5/8"	14	25.3	23.6
-12	3/4"	12	30.0	28.0
-16	1"	12	36.3	34.4
-20	1.1/4"	12	42.6	40.5
-24	1.1/2"	12	50.6	48.5

Measuring threads

With the calliper measure the thread diameter of the largest point. [Outside diameter (O.D.) of male threads. Inside diameter (I.D.) of female threads.]

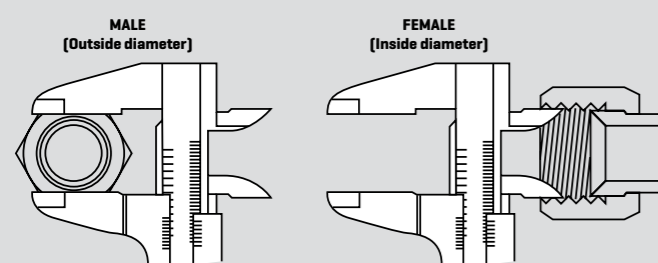


Using the thread gauge, determine the number of threads per inch. Comparison of gauge and coupling threads against a lighted background will ensure an accurate reading.




Measuring seat angles

Using the seat gauge, determine the angle of the seat, as illustrated. When the centreline of the seat gauge extends parallel with the projected longitudinal axis of the coupling, then the angles of the gauge and seat match.



Compare the measurements taken to a coupling shown in the tables above that appear to be similar.

NOTE: Thread binding will occur when different thread configurations are used. DO NOT mix thread configurations. Coupling thread identification kits containing reference charts, vernier, seat gauges and thread gauges are available. Order reference: 73589-4318.

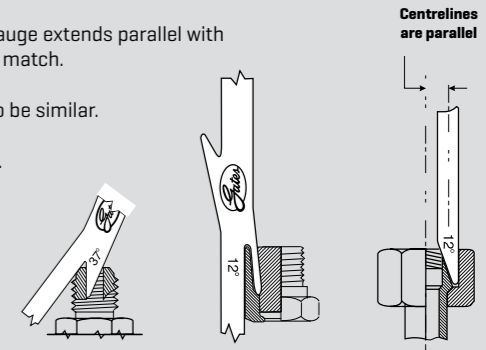

Mechanical joint or mated angle

This type of seal is found on National Pipe Straight Mechanical (NPSM), British Standard Pipe Parallel (BSP), JIC, SAE, JIS, Komatsu, DIN, North American Stand Pipe, Metric Stand Pipe, Inverted Flare and Kobelco. Different angles are used to create the seal, but the angles are cut two different ways, Standard and Inverted.

Standard seat couplings have the nose angle of the male on the outer surface of the coupling. These couplings are: JIC, SAE, JIS, Komatsu.

Inverted seat couplings contain the nose angle of the male on the inside bore of the coupling. These couplings are: [NPSM] National Pipe Straight Mechanical, [BSP] British Standard Pipe Parallel, DIN, North American Stand Pipe, Metric Stand Pipe, Inverted Flare and Kobelco.

A. O-Ring Location None **B. Nose Seat** Standard **C. Seat Angle** 37° **D. Coupling Termination** JIC 37° Flare

A. O-Ring Location None **B. Nose Seat** Standard **C. Seat Angle** 45° **D. Coupling Termination** SAE 45° Flare

A. O-Ring Location None **B. Nose Seat** Standard **C. Seat Angle** 30° **D. Coupling Termination** Japanese Industrial Standard & Komatsu

A. O-Ring Location None **B. Nose Seat** Inverted **C. Seat Angle** - **D. Coupling Termination** Metric Stand Pipe

A. O-Ring Location None **B. Nose Seat** Inverted **C. Seat Angle** 30° **D. Coupling Termination** National Pipe Straight

A. O-Ring Location None **B. Nose Seat** Inverted **C. Seat Angle** 45° **D. Coupling Termination** S.A.E. Inverted Flare

A. O-Ring Location None, Except -20 **B. Nose Seat** Inverted **C. Seat Angle** 24° Inclusive **D. Coupling Termination** French Gaz 24° cone

A. O-Ring Location None **B. Nose Seat** Standard **C. Seat Angle** 24° Inclusive **D. Coupling Termination** French Gaz 24° high pressure flange

Dash Size	Nominal Size	No. Threads per Inch	Male Thread O.D. (mm) MJ	Female Thread I.D. (mm) FX
-4	1/4"	20	11.0	9.9
-5	5/16"	20	12.5	11.5
-6	3/8"	18	14.1	12.9
-8	1/2"	16	18.9	17.5
-10	5/8"	14	22.1	20.5
-12	3/4"	12	26.9	25.0
-14	7/8"	12	30.0	28.2
-16	1"	12	33.2	31.3
-20	1.1/4"	12	41.2	39.2
-24	1.1/2"	12	47.6	45.5
-32	2"	12	63.5	61.4

Dash Size	Nominal Size	No. Threads per Inch	Male Thread O.D. (mm) MS	Female Thread I.D. (mm) FSX
-4	1/4"	20	11.0	9.9
-5	5/16"	20	12.5	11.5
-6	3/8"	18	15.9	14.3
-8	1/2"	16	19.1	17.5
-10	5/8"	14	22.1	20.5
-12	3/4"	14	26.9	25.0

Dash Size	Nominal Size	No. Threads per Inch	Male Thread O.D. (mm) MJIS	Female Thread I.D. (mm) FJISX	Nominal Size (mm)	Metric Thread Size (mm)	Male Thread O.D. (mm) MK	Female Thread I.D. (mm) FXK
-4	1/4"	19	13.5	11.7	6.3	M14x1.5	14.0	12.5
-6	3/8"	19	16.7	15.2	9.5	M18x1.5	18.0	16.5
-8	1/2"	14	20.5	18.9	13.0	M22x1.5	22.0	20.5
-10	5/8"	14	23.1	20.5	16.0	M24x1.5	24.0	22.5
-12	3/4"	14	26.3	24.4	19.0	M30x1.5	30.0	28.5
-16	1"	11	33.4	30.6	25.0	M33x1.5	33.0	31.5
-20	1.1/4"	11	42.1	38.9	32.0	M36x1.5	36.0	34.5
-24	1.1/2"	11	47.6	45.3	38.0	M42x1.5	42.0	40.5
-32	2"	11	59.6	56.4	-	-	-	-

Dash Size	Nominal Size (ins)	No. Threads per Inch	Male Thread O.D. (mm) MSP	Metric Nut DIN Tube O.D. (mm) MSP	Metric Nut Thread - Light (mm) MP	Metric Nut Thread - Heavy (mm) FPX
-2	1/8"	27	6.0	M12 x 1.5	-	-
-3	3/16"	24	8.0	M14 x 1.5	M16 x 1.5	-
-4	1/4"	20	10.0	M16 x 1.5	M18 x 1.5	-
-5	5/16"	20	12.0	M18 x 1.5	M20 x 1.5	-
-6	3/8"	18	15.0	M22 x 1.5	-	-
-7	7/16"	18	16.0	M26 x 1.5	-	-
-8	1/2"	16	18.0	M26 x 1.5	-	-
-10	5/8"	14	20.0	-	M30 x 2.0	-
-12	3/4"	14	22.0	-	-	M36 x 2.0
-14	7/8"	12	25.0	-	-	-
-16	1"	12	28.0	-	-	-
-20	1.1/4"	12	30.0	-	-	-
-24	1.1/2"	12	38.0	-	-	-
-32	2"	12	42.0	-	-	-

Dash Size	Nominal Size (ins)	No. Threads per Inch	Male Thread O.D. (mm) MP	Female Thread I.D. (mm) FPX
-2	1/8"	27	10.3	9.1
-4	1/4"	18	13.9	11.9
-6	3/8"	18	17.3	15.1
-8	1/2"	14	21.6	19.0
-12	3/4"	14	27.0	24.2
-16	1"	11	33.7	30.6
-20	1.1/4"	11	42.5	38.9
-24	1.1/2"	11	48.6	45.2
-32	2"	11	60.7	57.2

Dash Size	Nominal Size (ins)	No. Threads per Inch	Male Thread O.D. (mm) MIX	Female Thread I.D. (mm) FI
-2	1/8"	28	7.9	7.1
-3	3/16"	24	9.5	8.3
-4	1/4"	24	11.0	9.9
-5	5/16"	20	12.5	11.5
-6	3/8"	18	15.7	14.7
-7	7/16"	18	17.4	15.9
-8	1/2"	18	18.9	17.9
-10	5/8"	18	22.1	20.6
-12	3/4"	16	26.8	25.4

Dash Size	Nominal Size (ins)	Metric Thread Size	Male Thread O.D. (mm) MFG	Female Thread I.D. (mm) FFGX
-4	1/4"	M20x1.5	20.0	18.5
-5	5/16"	M20x1.5	20.0	18.5
-6	3/8"	M20x1.5	20.0	18.5
-8	1/2"	M24x1.5	24.0	22.5
-10	5/8"	M30x1.5	30.0	28.5
-12	3/4"	M36x1.5	36.0	34.5
-16	1"	M45x1.5	45.0	43.5
-20	1.1/4"	M52x1.5	52.0	50.5

Dash Size	Nominal Size (ins)	"X" Dia (mm) MPFL	"X" Dia (mm) FPFL
-8	1/2"	17.0	17.0
-10	5/8"	21.0	21.0
-12	3/4"	27.0	27.0
-16	1"	34.0	34.0
-20	1.1/4"	42.0	42.0

Dash Size	Nominal Size	No. Threads per Inch	Male Thread O.D. (mm) MP	Female Thread I.D. (mm) FP
-2	1/8"	27	10.3	9.1
-4	1/4"	18	13.9	11.9
-6	3/8"	18	17.3	15.1
-8	1/2"	14	21.6	19.0
-12	3/4"	14	27.0	24.2
-16	1"	11	33.7	30.6
-20	1.1/4"	11	42.5	38.9
-24	1.1/2"	11	48.6	45.2
-32	2"	11	60.7	57.2

Dash Size	Nominal Size	No. Threads per Inch	Male Thread O.D. (mm) MBSP
-2	1/8"	28	10.1
-4	1/4"	19	13.6
-6	3/8"	19	17.1
-8	1/2"	14	21.5
-10	5/8"	14	23.4
-12	3/4"	14	27.0
-16	1"	11	33.9
-20	1.1/4"	11	42.6
-24	1.1/2"	11	48.5
-32	2"	11	60.5

Thread interface

This type of seal is found on the (NPTF) National Pipe Tapered for Fuel or the (BSPT) British Standard Pipe Taper. Characteristics of this thread is the male has a smaller diameter at the end, tapering to a larger diameter at the hexagon. When the male is screwed into the female the thread deforms, thus creating the seal.

D. Coupling Termination

National Pipe Tapered

British Standard Pipe Tapered